



Which type of separator/air dryer can be used on which place to upgrade you pressed air :

This Eliminex will remove bulk water and dirt. Alternatively an Eliminex Combo could be used to remove oil as well.

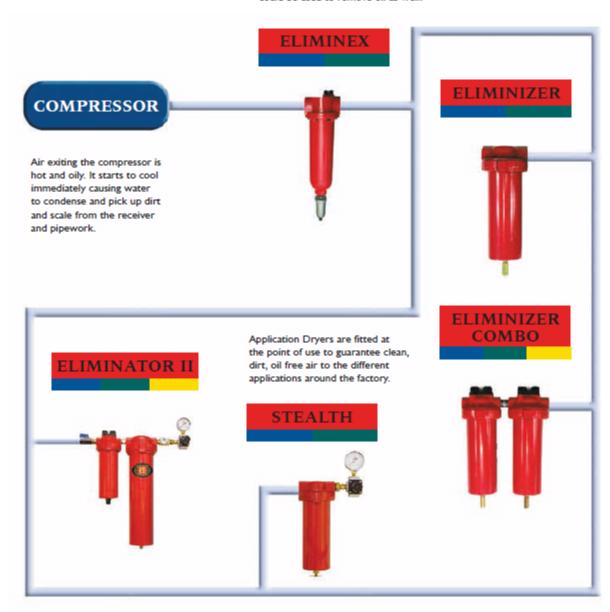

CONTAMINATION REMOVAL CODE



IM-Supply B.V.

Mekkelholtsweg 20 , 7523 DE Enschede, The Netherlands

Phone: +31 (0)74 256 9777, E-mail: info@rm-support.nl



Product selection diagram:

Required air quality	Elimination of	Product	Application
Clean , dry air at supply point	Dirt/ water	Eliminizer of Stealth	Vacuum, injection moulding, CNC Equipment, robotics, Assembly Automatic, Paper Manufacturing, Saw mills, Bottling/ Brewing, Cement Plants, Wood Working, Construction, Mining, Packing Equipment, Material Handeling, Automative, air tools, Shot Blasting, Metal casting
Clean, dry and oil free air at the supply point.	Dirt , water and oil	Eliminizer Combo	Spray Painting, CMM, Dental Equipment, Instrument Air, Printing Presses, Blow Moulding, Slik Screening, clean Rooms, Food Processing Equipment, Photographic labs, Plasma Cutting Machines, Powder coating, textile Production.
Clean, dry air with dew point suppression at the supply point.	Dirt, water and oil	Eliminator II	Air- logic, Instrument Air, Photographic Labs, Air gauging Equipment,CMM, Spray painting.
Water/ condensation elimination in the main air supply line.	Dirt and water	Eliminex	Compressor Main air supply line, Branch legs to Vacuum pompen, shot blasting.
Water/condensation and oil elimination at the main air supply line.	Dirt, water and oil	Eliminex Combo	Compressor Main air Supply line, Branch legs, Pre-filter to Refrigeration Dryer of Desiccant dryer.

IM-Supply B.V.

Mekkelholtsweg 20 , 7523 DE Enschede, The Netherlands

Phone: +31 (0)74 256 9777, E-mail: <u>info@rm-support.nl</u>